




# HC60B




**STARTING, LIGHTING & IGNITION (SLI)  
MAINTENANCE FREE AGM BATTERY**

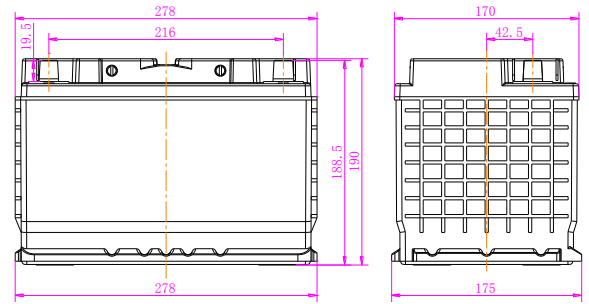

<b>HC60B (DIN Standard:L3)</b>	
<b>Dimensions:</b>	
Length	278mm(10.94inches)
Width	175mm(6.89inches)
Container Height	190mm(7.48inches)
Total Height	190mm(7.48inches)
Weight	Approx.21.8kg (48.06lbs)

## Discharge Characteristics

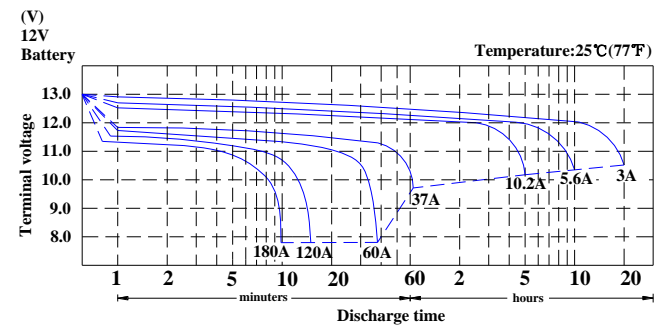

## General Specifications:

20Hr (Ah)	Reserve Capacity (Minutes)			Cranking Performance				Terminal
	25A	56A	75A	CA(BCI)	CCA (BCI)	CCA (IEC)	CCA(DIN)	
60	120	38	28	810A	680A	450A	360A	AP

## Constant Current Discharge Rating Amperes @77°F (25°C) to 10.02V

5min	10min	15min	30min	1hr	3hr	5hr	10hr	20hr
240	168	112	68	36.5	15.2	10.4	5.7	3.15

**Note:** Reserve Capacity (RC) = Number of minutes a fully charged battery can carry a load of 25, 56 or 75 amps and maintain 10.5 volts minimum.

CCA(DIN) = amps at - 18°C (0°F) a fully charged battery can carry and maintain 9.0V minimum for 30 secs & 6.0V minimum for 150 secs.

CCA (IEC)= amps at - 18°C (0°F) a fully charged battery can carry and maintain 8.4V minimum for 60secs.

CCA (BCI) = amps at - 18°C (0°F) a fully charged battery can carry and maintain 7.2V minimum for 30 secs.

CA (BCI) = amps at 0°C(32°F) a fully charged battery can carry and maintain 7.2V minimum for 30 secs.